Circuit Diagram of DH6 Section (Version: 12 Edit: 148)

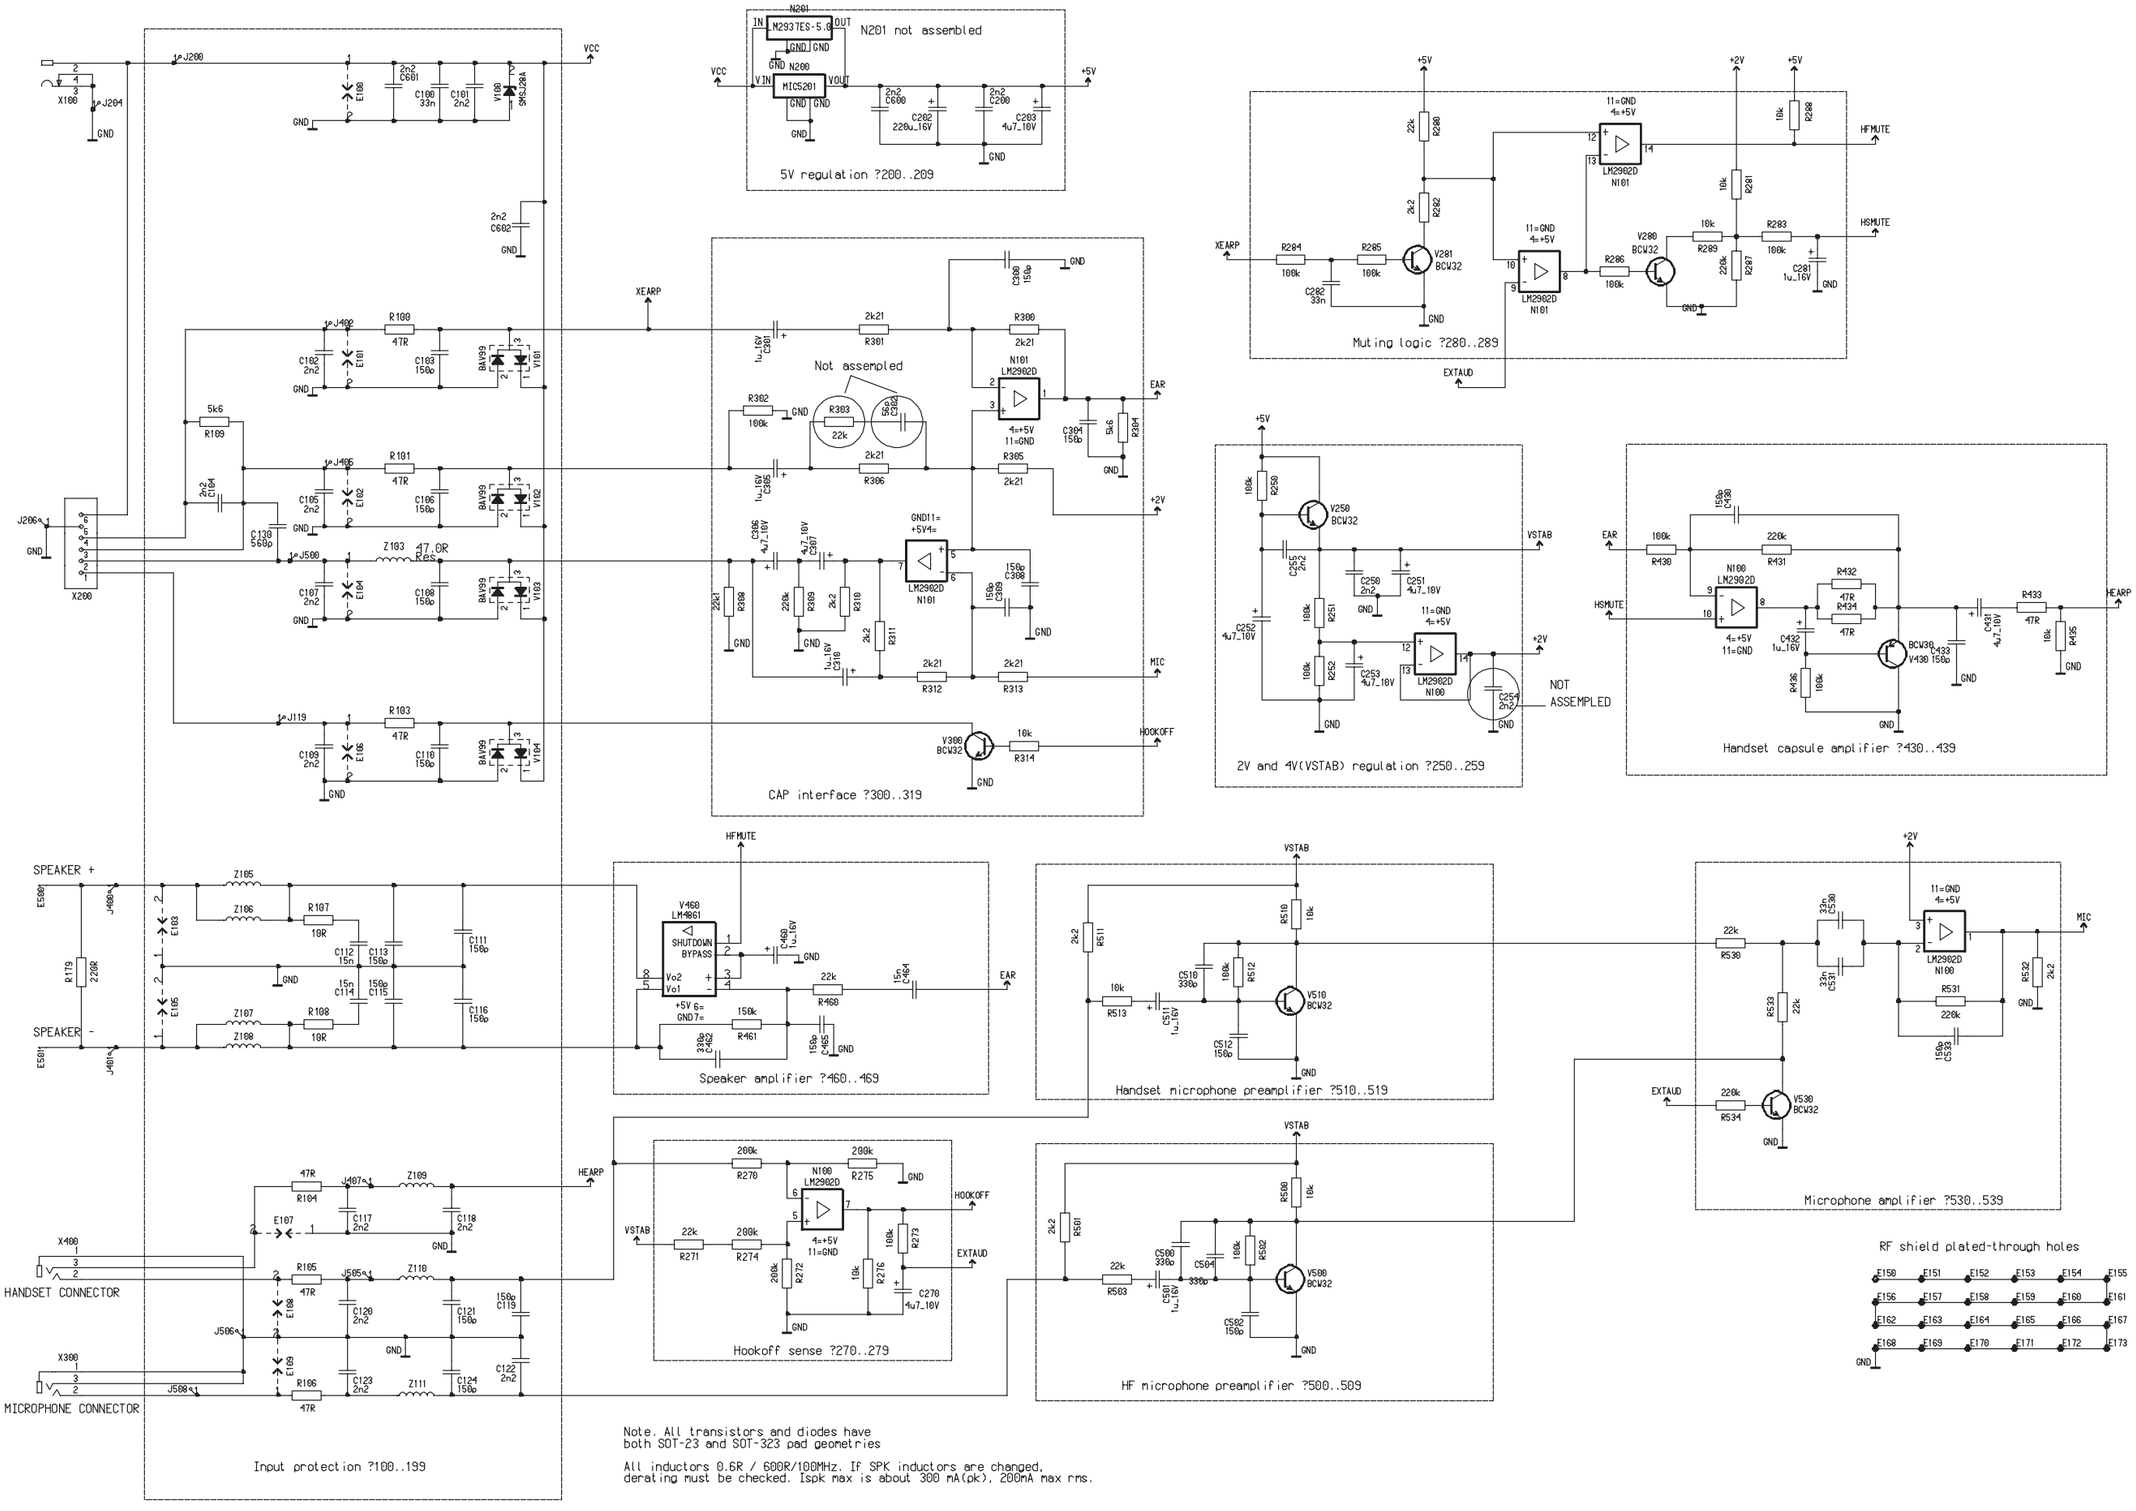
N201 not assembled
5V regulation ?200..209
Not assempled
CAP interface ?300..319
Muting logic ?280..289
2V and 4V(VSTAB) regulation ?250..259
NOT ASSEMPLED
Handset capsule amplifier ?430..439
Input protection ?100..199
Speaker amplifier ?460..469
Handset microphone preamplifier ?510..519
Microphone amplifier ?530..539
Hookoff sense ?270..279
HF microphone preamplifier ?500..509
HANDSET CONNECTOR
MICROPHONE CONNECTOR
SPEAKER +
SPEAKER -
RF shield plated-through holes
Note. All transistors and diodes have
both SOT-23 and SOT-323 pad geometries
All inductors 0.6R / 600R/100MHz. If SPK inductors are changed,
derating must be checked. Ispk max is about 300 mA(pk), 200mA max rms.